


小冶精通（天津）液压机械有限公司

XEYG型重型超长液压缸

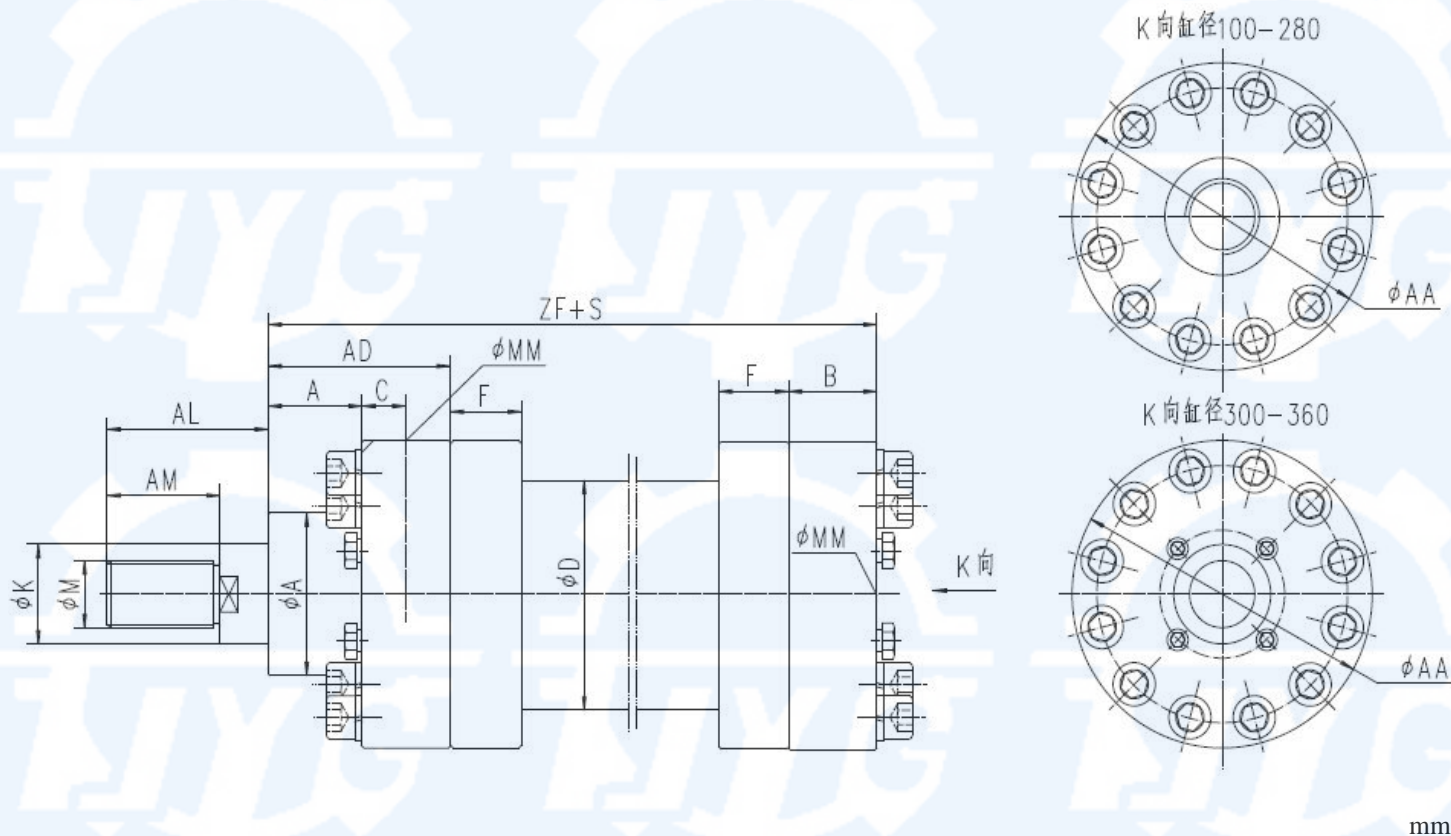

mm

缸径	杆径 Φ_k	螺纹 ΦM	AM	AL	ΦA	A	ΦAA	AD	F	C	油口 ΦMM	ΦD	B	ZF+S
100	70	M48X1.5	40	65	110	65	178	138	28	26	M33X2	121	44	235
125	80	M72X3	70	97	145	83	210	153	35	25	M33X2	152	68	271
140	90	M72X3	75	106	150	88	210	170	35	31	M33X2	168	57	241
160	120	M80X3	80	118	190	90	265	180	40	35	M42X2	194	58	323
180	140	M12X3	80	117	210	125	285	200	45	28	M33X2	219	68	353
200	140	M100X3	80	125	210	116	310	206	45	35	M42X2	245	65	372
200	140	M100X3	80	120	210	145	310	235	48	35	M42X2	245	68	399
220	185	M160X3	100	180	260	114	360	204	58	38	M48X2	273	68	406
250	185	M130X3	85	120	270	107	382	197	55	35	M48X2	299	70	360
250	185	M160X4	130	170	270	135	382	225	60	35	M48X2	299	70	393
280	210	M180X4	100	137	280	142	414	245	60	40	M48X2	325	68	400
300	210	M160X4	100	150	320	98	438	203	65	37.5	M48X2	351	80	389
320	230	M160X4	100	150	320	151	458	256	60	41	M48X2	377	90	446
340	230	M180X3	120	155	375	110	495	208	70	35	M48X2	402	98	405
350	230	M180X3	120	155	375	112	495	210	70	35	M48X2	402	98	407
360	230	M180X3	120	90	360	121	518	226	60	37.5	M48X2	426	98	494

备注：1.缸径100-280后油口为螺纹连接，缸径300-360后油口可选法兰连接，也可选螺纹连接。

2.缸径360活塞杆头螺纹为螺纹。